

VOLANS PREMIUM

Product Code GT. Volans Premium 24v (add suffix see below)

DESCRIPTION / Linear flexible LED strip, 8mm wide with invisible Dow Corning resin coated


IP54

WHY USE THIS: Versatile (SMT) LED of high quality CRI90 and high performance. Very close pitch allows for 50mm cutting centres. Ideal for long runs. Fully dimmable

and matched with many profiles suitable for all genral lighting applications.

8MM WIDE

9MM PITCH, CUTTING CENTRES 50MM

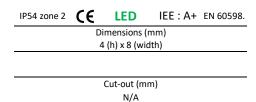



Contact us for the range of profiles

material light fixture PVC / plastic mix; copper conductors 4oz

colours & finish/ (suffix) Clear

50MM

light source & voltage a) (2835) 5w/m LED 140deg (400 lms/m) 24v DC options b) (2835) 10w/m LED 140deg (800 lms/m) 24v DC

(PLEASE CONTACT US FOR c) ALTERNATIVE SOURCES) d)

120 LEDs/m

colour temperature /(suffix) 2400K*/2700K / 3000K / 4000K / 6000k* (*to order) CRI (colour render) /(suffix) 90+

MacAdam 3

Controls options /(suffix) phase dimming

DALI 0-10V

Optional Accessories See p.2 for available profiles

See p.3-4 for driver options


AV. Weight (kg) 0.04/m

Emergency Available? Yes

Special Notes Supplied with 1m attached 'power-lead'. Cutting and soldering service


available. Supplied with 3m tape as standard

technical performance

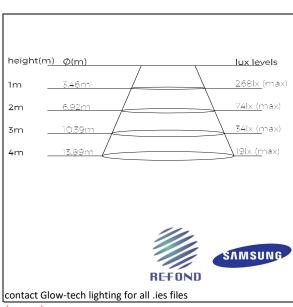




PROFILES FOR VOLANS 8MM WIDE






General purpose – can be trimless



Outdoor sealed







Lensed for partial wall washing

Pivoting mount for A1715




Coffers & shadow gap

Volans Mini




Smallest profile. – High output. Joinery & confined spaces











DRIVER OPTIONS DRIVER + DIMMING INTERFACE OPTIONS

Image	Code	dims	IP rating	Power	Inrush (A)	Comment
	GT.HLG-480-24	262 X 125 X 43.8mm	IP65	480w	70A	For dimming use with MULTIPLE DT.ECP-701-8A below (additional in-rush current limiter available)
	GT.HLG-320	252 X 69 X 45MM	IP67	320w	70A	POTENTIOMETER BUILT-IN For dimming use with MULTIPLE DT.ECP-701-8A below (additional in-rush current limiter available)
NICO WINDOWS IN THE PARTY OF TH	GT.HLG-240	247 X 69 X 39MM	IP67	240w	75A	POTENTIOMETER BUILT-IN For dimming use with MULTIPLE DT.ECP-701-8A below (additional in-rush current limiter available)
The sent of the	GT.SL-24200D024	235 X 120 X 56MM	IP67	200w	75A	For dimming use with DT.ECP-701-8A below 2-CHANNELS OF 100W
	GT.SL-24150D024	235 X 120 X 56MM	IP67	150w	65A	For dimming use with DT.ECP-701-8A below
	GT.LPV-150	191 X 63 X 37.5MM	IP67	150w	65A	For dimming use with DT.ECP-701-8A below
The state of the s	GT.SL-24100D024	249 X 66 X 52MM	IP67	100w	60A	For dimming use with DT.ECP-701-8A below
	GT.LPV-100	190 X 52 X 37.5MM	IP67	100w	75A	For dimming use with DT.ECP-701-8A below
	GT.SL-VB-240-60P	199 X 66 X 52MM	IP67	60w	55A	For dimming use with DT.ECP-701-8A below
	GT.LPV-60	162 X 42.5 X 32MM	IP67	60w	60A	For dimming use with DT.ECP-701-8A below
	GT.SL-VB-240-30M	222x 29 x 20	IP67	30w	40A	For dimming use with DT.ECP-701-8A below
	GT.LPV-35	148 X 40 X 30MM	IP67	30w	55A	For dimming use with DT.ECP-701-8A below
	GT.SL-VA-240-15U	222x 29 x 20MM	IP67	20w	35A	For dimming use with DT.ECP-701-8A below
Constitution of Chairs and	GT.ECP-701-8A	82 x 33 x 20mm	IP20		1AX 0-10V NG INTERFACE	DIMS DOWN <10% FROM ZERO
	GT.ECP-701-12A	175 x 44 x 33	IP20		1AX 0-10V NG INTERFACE	DIMS DOWN <10% FROM ZERO



DRIVER OPTIONS (continued)



 DT.ECP-701-8A

 DALI
 158x 50.5x 34
 IP20
 200W MAX DALI DIMMING INTERFACE

 200W MAX DMX DIMMING INTERFACE
 200W MAX DMX DIMMING INTERFACE
 (DUAL OPERATION)

200W MAX DMX DIMMING INTERFACE

DRIVER OPTIONS TRIAC DIMMING DRIVER - ONE PIECE OPTIONS

Image	Code	dims	IP rating	Power	Inrush (A)	Comment
All these of an investment party. Section 1. Section 1	GT.ELED-25-24-T	155 x 54 20	20	25w	35A	Works with leading edge TRIAC dimmers
Tell long that having hardway right for the control of the control	GT.ELED-50-24T	174x 61x 24mm	20	50W	50A	Works with leading edge TRIAC dimmers
The prompt the control of the contro	GT.ELED-80-24T	200x 68.5x 43	66	80W	55A	Works with leading edge TRIAC dimmers


NOTE DRIVER MUST BE LOADED ABOVE 75% CAPACITY FOR SMOOTH DIMMING






WIRING AS A RING CIRCUIT - OVER 5M

If LED strip is greater than 5m then circuit must be wired as a ring. Drivers can be mounted up to 20m away, provided the above is respected and 1.5mm cable used from the driver to the LED strip. In cases of drivers mounted over 10m from strip a bench test is recommended.

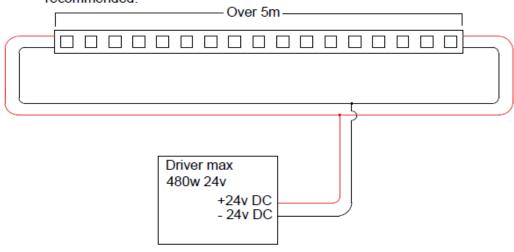

WIRING FOR 0-10V OR DALI DIMMING

This circuit is the standard layout for LED strip of 5m or less. for 5.1m - 10m strip should be fed from both ends (separate diagram available)

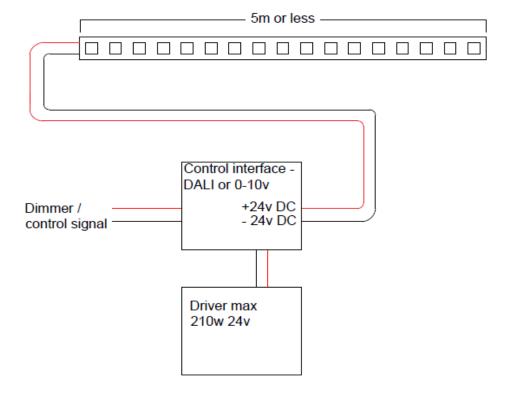



SCHEMATICS

WIRING FOR DMX INTERFACE CONTROL OF RGB

If LED strip is greater than 5m then circuit must be wired as a ring. Drivers can be mounted up to 20m away, provided the above is respected and 1.5mm cable used from the driver to the LED strip. In cases of drivers mounted over 10m from strip a bench test is recommended.

