

Aria PRO CAN

DESCRIPTION / Round LED surface dark-light downlight. Adjustable 30deg tilt.


WHY USE THIS: Slim discreet anti-glare look, directional with good angle of tilt. Suitable for all general downlight applications including wet areas. **Dim-to-warm available**




IP20, IP54 **CE** **LED** IEE : A+ EN 60598.


Dimensions (mm)
h136mm x 76mm

Cut-out (mm)
n/a

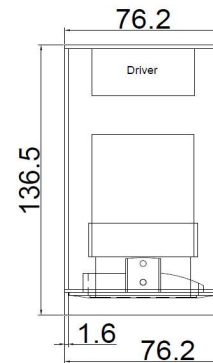

material light fixture	Die Cast Aluminium
colours & finish/ (suffix)	White - 11 or -RAL xxxx
light source & voltage options	a) 9w LED (800 lms) 200 mA 45v b) GU10 7w LED 36 deg (560 lms) 240v c) DIM TO WARM OPTION AVAILABLE BEAM ANGLES 16 deg, 28deg, 40deg 60 deg
colour temperature	2700K / 3000K
CRI (colour render)	90+
Controls options /(suffix)	Phase Dimming internal DALI, 0-10v Casambi 

Special Notes **Internal driver for mains dimming, IP20 directional and IP54 directional available**

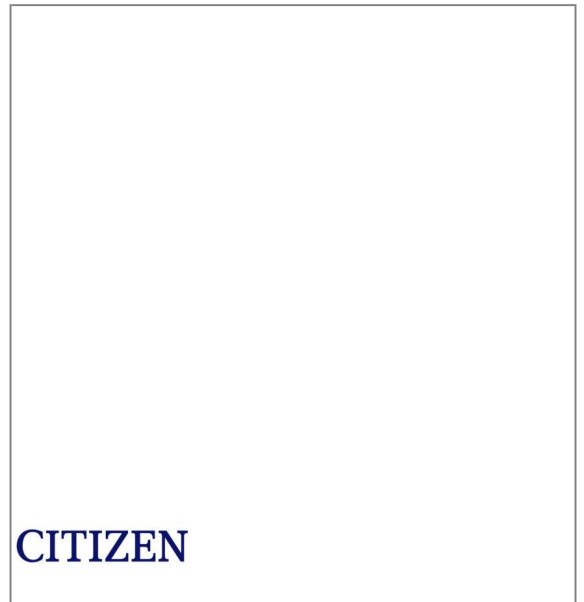


INSTALLATION



GU10 Version (Termination inside)

LED Version (Mains dim driver internal)

Turn off power!



Make electrical connections as necessary. If light source requires driver pass it through into void at this stage

