

Volta

Code : GT. WL3109

CE IP65 CRI>90 ³SDCM

Description

Mini round LED path light; low-glare. Fixed asymmetric 30° beam fixed. IP65 dimmable. Supplied with recessing tube

Materials Die Cast Aluminium


Colour finish White RAL9003 Black RAL9005, custom RAL to order

Dimensions (mm) 34 x 65 dia. (Sleeve 55mm length) **Weight (KG)** 0.2

Light Source

3w LED (180 lms) Luminus CXM-3 24v DC

CCT available 2700K / 3000K


Dimming Phase, 0-10v, DALI (remote). Casambi  allows dimming control of each fixture

Special Notes


See p.2 for mounting and wiring information




SLEEVE 55mm cut-out

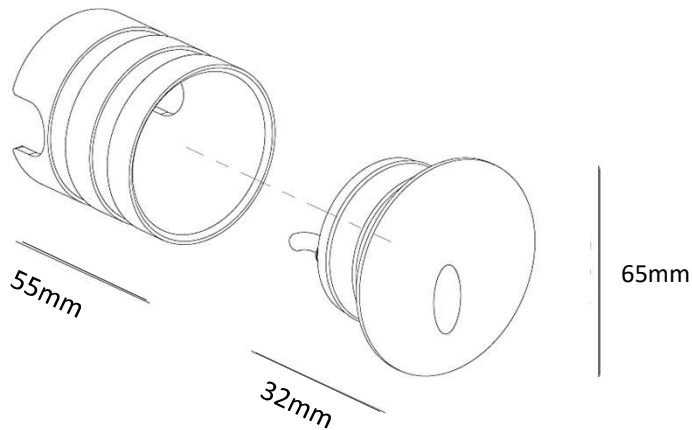

Plasterboard fixing

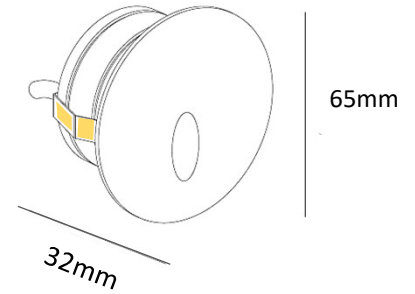

INDOOR / OUTDOOR FIXING TUBE FOR MASONRY WALLS

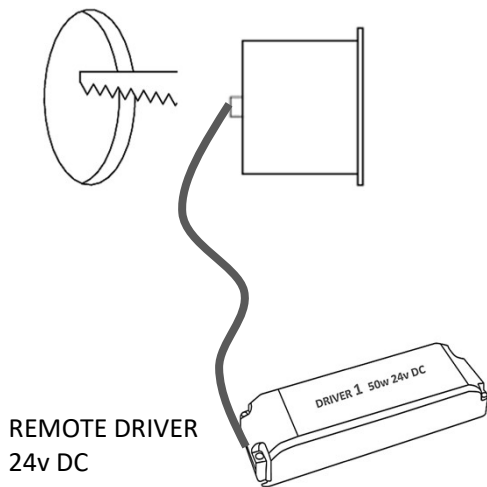

- Constant Voltage DC fittings must be wired in parallel.
- **SET DRIVER TO CORRECT OUTPUT**
- Use flex from driver to fitting
- Dirt or grit on the gasket may cause luminaire to leak