

# Deneb-Plus Trimless

CE CRI>93 IP54 <sup>3</sup>SDCM

## Description

Circular LED Recessed trimless downlight. Directional 24° tilt, 40MM OPENING APERTURE. Contemporary look, minimum dimensions. Good output; suitable for accent downlight applications. IP54 rated. FIRE-RATED

## Materials


Die Cast Aluminium

**Colour finish** White trim 9003. BLACK baffle RAL9005, custom RAL combinations to order

**Dimensions (mm)** Visible aperture 40mm x 87.5 (h)      **Weight (KG)** 0.3


**Light Source** 9W (250mA 36V) Luminus CXM-3 (700lm) 260mA 18v 15° 36°

**CCT available** 2700K / 3000K


**Dimming:** Phase, 0-10v, DALI (remote). Casambi  allows dimming control of each fixture




# Deneb Plus Trimless

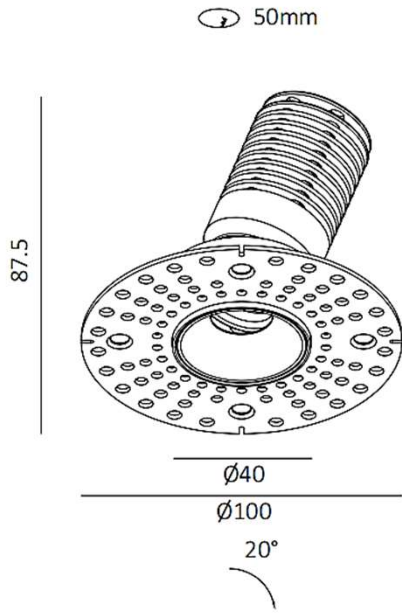

White or black insert

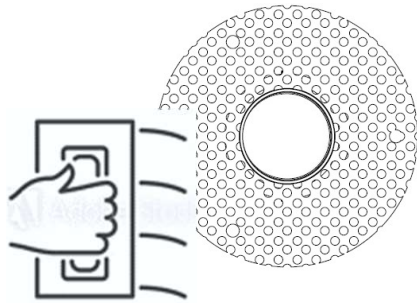

MAINS DIM DRIVER WILL PASS THROUGH HOLE,  
**DALi is REMOTE DRIVER**

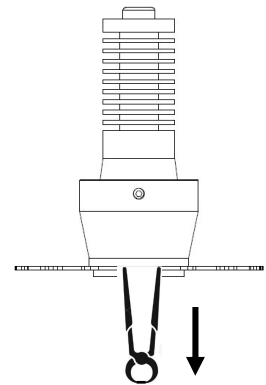

Tool to remove from frame

## TECH NOTES:

- Recommended to allow minimum free space of 20mm above fixture.
- Supplied with 1m cable