

Deneb-PLUS Trim

CE CRI>93 IP54 ³SDCM

Description

Circular LED Recessed trim downlight. Directional 20° tilt, 40MM OPENING APERTURE. Contemporary look, minimum dimensions. Good output; suitable for accent downlight applications. IP54 rated. FIRE-RATED

Materials


Die Cast Aluminium

Colour finish White trim 9003. BLACK baffle RAL9005, custom RAL combinations to order

Dimensions (mm) Visible aperture 40mm x 87.5 (h) **Weight (KG)** 0.3


Light Source 9W (250mA 36V) Luminus CXM-3 (700lm) 260mA 18v 15° 36°

CCT available 2700K / 3000K / 4000K


Dimming: Phase, 0-10v, DALI (remote). Casambi  allows dimming control of each fixture



Deneb Plus Trim

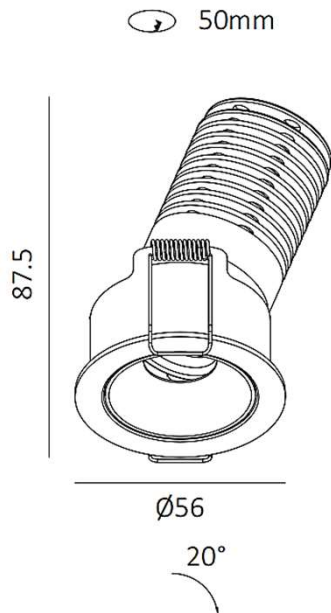


White or black insert

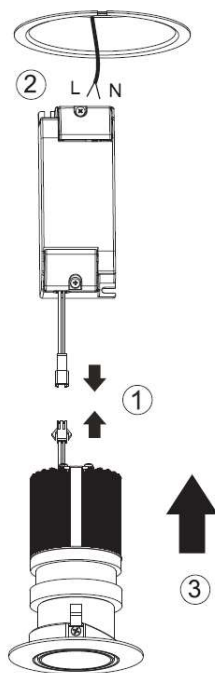


MAINS DIM DRIVER WILL PASS
THROUGH HOLE,
DALi is REMOTE DRIVER

TECH NOTES:


Recommended to allow minimum free space
of 20mm above fixture.
Supplied with 1m cable



Switch off mains power before installation.




Do not cover luminaires with insulation material.

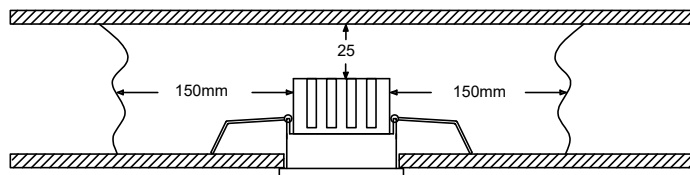

If product is marked as 'Fire-rated' it is tested to EN1365

Keep dimming and power separate

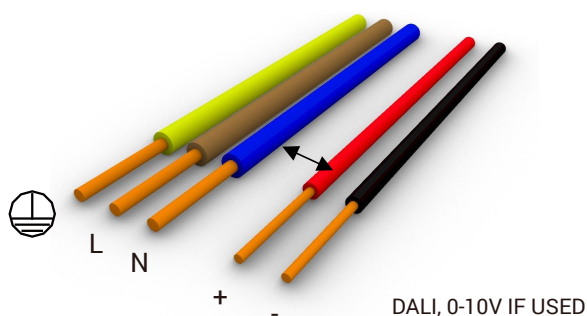

WARNING!

LED must not be disconnected while the driver is live, this will damage LED chip





Consider proximity to heating pipes, hot water pipes and other factors which may cause excessive heat, cold or moisture build up

Check the capacity of any dimmers used. Observe any minimum load, and it is common for the maximum rating to be derated for LED. If in doubt, consult the dimmer manufacturer.

Consider proximity to heating pipes, hot water pipes and other factors which may cause excessive heat, cold or moisture build up

LED & Driver

CUT-OUT PAGE 1

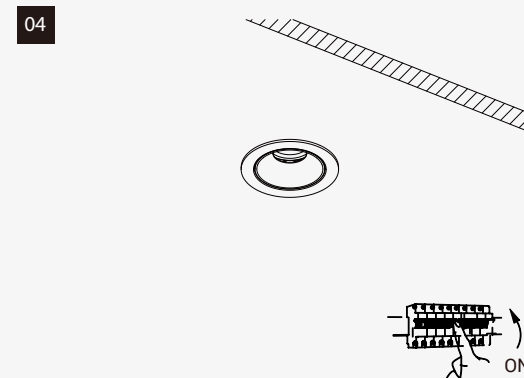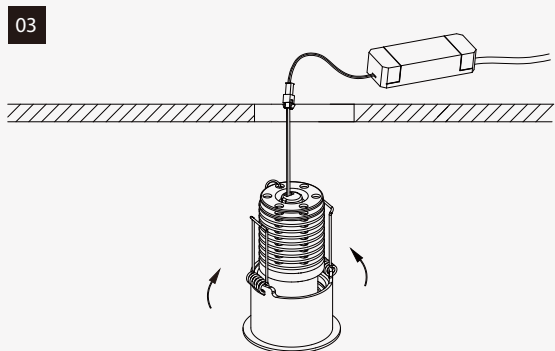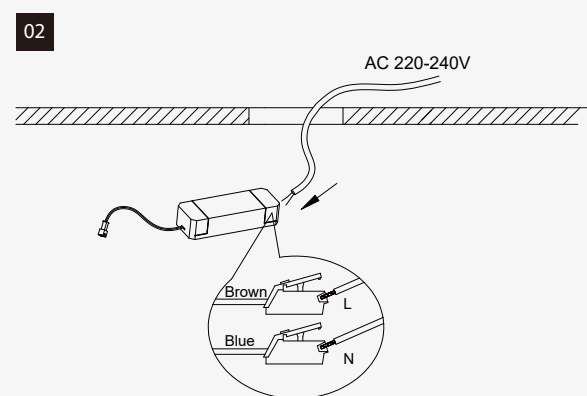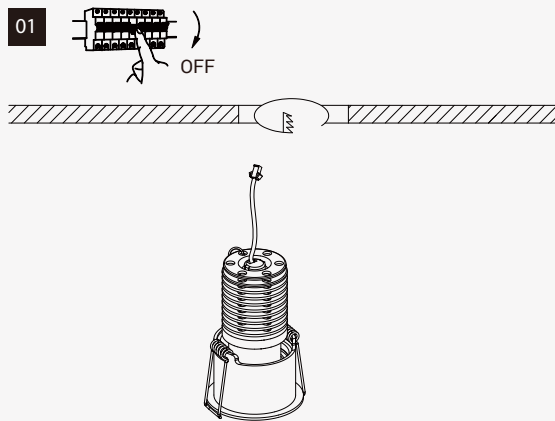

Refer to instructions supplied with the CC LED driver for connection details
Observe the LED warning label attached to the modules cable. Do not remove label prior to installation. Incorrect wiring will void any warranty claim