

Aria-PRO (trimless)

IP20 Zone 3



LED


IEE : A+ EN 60598.

DESCRIPTION / Round LED Recessed dark-light downlight. Adjustable 30deg tilt.


Dimensions (mm)
h100mm (max) x 70mm

WHY USE THIS: Slim discreet anti-glare look, directional. Trimless with good angle of tilt. Suitable for all general downlight applications including wet areas. **Dim-to-warm available**


Cut-out (mm)
77 (trimless frame)

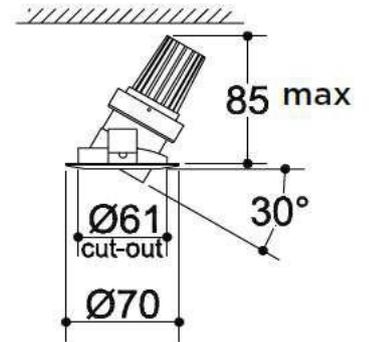

Cut-out 77mm

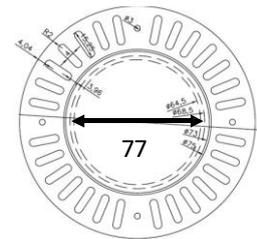


material light fixture	Die Cast Aluminium
colours & finish/ (suffix)	White - 11 or -RAL xxxx
light source & voltage options	a) 9w LED (800 lms) 200 mA 45v b) 11w LED 40 deg (975 lms) 250 mA 44v c) GU10 7w LED 36 deg (560 lms) 240v DIM TO WARM OPTION AVAILABLE
colour temperature	BEAM ANGLES Narrow, medium, wide 2700K / 3000K
CRI (colour render)	90+
Controls options /(suffix)	Phase Dimming DALI 0-10v

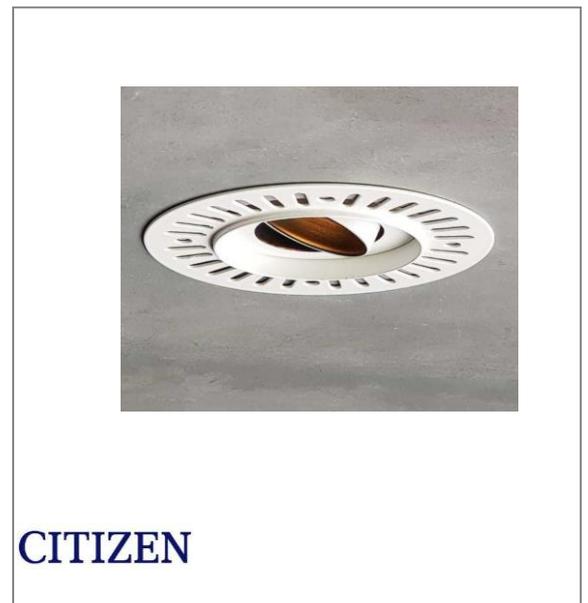

CITIZEN


Special Notes **Trimless plaster frame supplied separately. CUT-OUT 77mm**

INSTALLATION



TECH NOTES:

Allow minimum free space of 20mm - 25mm above fixture.
For minimum height see above specification sheet.




WARNINGS:

Do not cover top of fitting with insulation, as doing so will cause fitting to overheat substantially compromising its life span. Always be aware of any heating or hot water pipes which may cause ambient temperature to exceed 40°C


Turn off power!

1



2

CUT DESIRED HOLE, FIX PLASTER-IN RING IF SUPPLIED

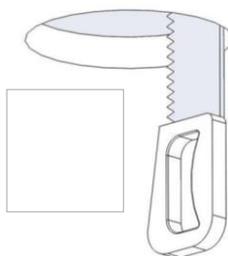


1) Always ensure power is isolated prior to undertaking any electrical work.

2) . IF flush fixing frame used, then this is screwed to ceiling now before skimming

Make electrical connections as necessary. If light source requires driver pass it through into void at this stage

3

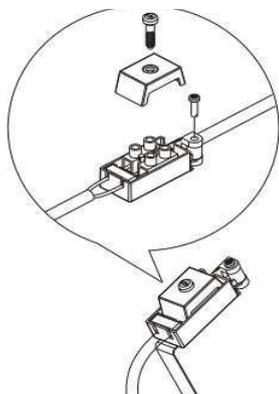

4

UN-CURL SPRINGS BEFORE OFFERING INTO HOLE



3) cut hole in ceiling to size specified for fitting

make electrical connections as necessary. For fittings with remote driver, pass driver through ring into ceiling void at this time.

4) UN-CURL FIXING SPRINGS AND POSITION INTO CEILING HOLE. For wall washing ensure unit is fitted to allow maximum tilt and ensure adequate clearance to any joists or obstructions.