Daxton

Code : see p.2   CE   **IP20**   **IP65**   CRI**>90** *SDCM*

Description

Innovative multi-functional range, allows the designer to easily change lighting effects as the function of each space changes. Ideal for residential, hospitality and commercial applications.

One trimless ceiling ring, 4 lighting types using the same components & driver. All use the same high quality rendering LED chip. Fully dimmable, in a range of finishes

Materials   Die Cast Aluminium

Colour finish   White RAL9003 custom RAL & plated versions to order

Dimensions (mm) see p.2 (frame cut-out 80)   **Weight (KG)** 0.20
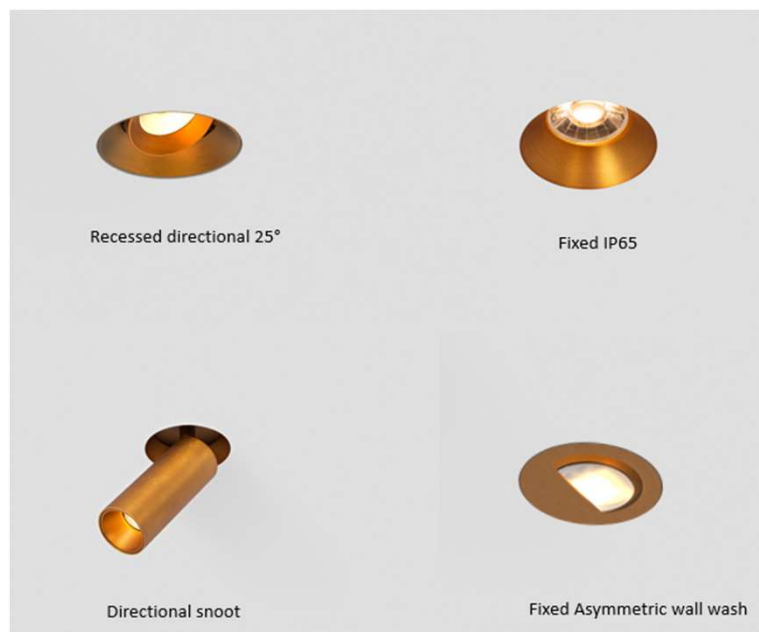
Light Source

Citizen CLU02Q-1202 9.6W (260mA 36V) CRI93 Nom. 900 lumens

Beam angles 15° 24° 36° 45° 50°
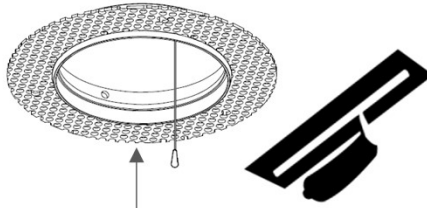
CCT available   2700K / 3000K

Dimming   Phase,
DALI
Casambi ✶ allows dimming control of each fixture
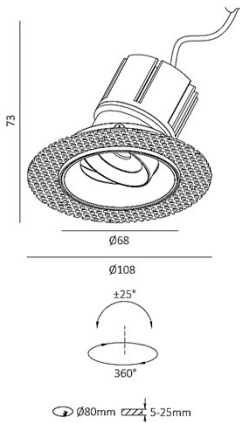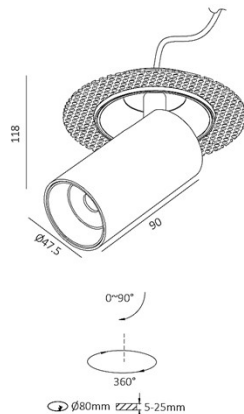
Special Notes Remote driver on all models

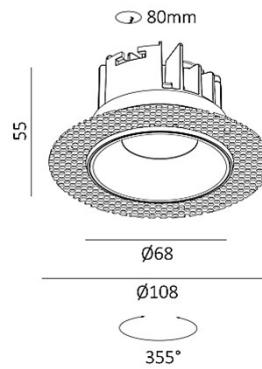Recessed directional 25°   Fixed IP65

Directional snoot   Fixed Asymmetric wall wash

Glow-tech Lighting
t. 07564833140
info@glow-tech.co.uk
www.Glow-tech.co.uk

All products produced in accordance to EN60598

Daxton

Cut-out 80mm

GT.DL3771
25° directional
Beam 24° 50°

73

Ø68
Ø108
±25°
360°
⌀80mm 5-25mm

GT.DL3675
90° Tilt angle
Beam 15° 24° 36°

118
Ø47.5
90
0~90°
360°
⌀80mm 5-25mm

GT.DL3676
Fixed IP65
Beam 24° 50°

80mm
55
Ø68
Ø108
355°

GT.DL3772
Wall-washer
Fixed lens

41
Ø68
Ø108
360°
⌀80mm 5-25mm

All products produced in accordance to EN60598